



Function The jack support has been designed for the installation of any type of flooring on any surface, allowing inspection of the various systems beneath, without needing to demolish anything.

Compatibility -

Range h 25 - h 35

Performance The material they are made of makes them resistant to acidic and basic solutions and weathering.

Operating temperature -40°C; +75°C

Recycled product Yes

Recyclable product Yes

Included accessories: -




Material PP T 20%

Optional accessories: Slope corrector
 Levellers
 Adjustable handle
 Distribution disc
 -

Additional information

Jack supports are made 100% with regenerated material from refinery plant.
 All types of Jack Support are guaranteed to bear concentrated loads of 400 kg each.

If not otherwise indicated, all measurements are expressed in millimetres.

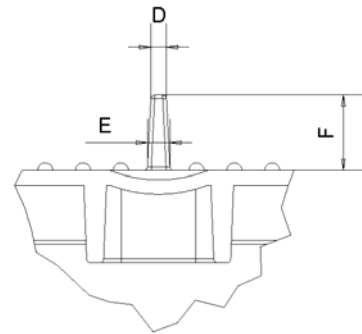

Line Item	Description
1 240-355-100-025	FIXED HEIGHT SUPPORT H 25 T4-SP02-H10 HEAD
2 240-355-100-035	FIXED HEIGHT SUPPORT H 35 T4-SP02-H10 HEAD

A	B	C	D	E	F	G	H	I
200	24,4	120	2,1	2,6	10	36,7	54,0	
200	35,4	120	2,1	2,6	10	36,7	54,0	

If not otherwise indicated, all measurements are expressed in millimetres.