

Function The jack support has been designed for the installation of any type of flooring on any surface, allowing inspection of the various systems beneath, without needing to demolish anything. The perfect final flooring-leveling is possible thanks to the nut with inside threading which allows movements in height to the nearest millimeter.

Compatibility -

Range h 35-50 - h 50-70 - h 65-100 - h 95-130 - h 125-160- h 155-190 - h 185-220

Performance The material they are made of makes them resistant to acidic and basic solutions and weathering.

Operating temperature -40°C; +75°C

Recycled product Yes

Recyclable product Yes

Included accessories: -




Material PP T 20%

Optional accessories: Slope corrector
 Levellers
 Adjustable handle
 Distribution disc
 Extension

Additional information

Jack supports are made 100% with regenerated material from refinery plant.
 All types of Jack Support are guaranteed to bear concentrated loads of 400 kg each.

If not otherwise indicated, all measurements are expressed in millimetres.

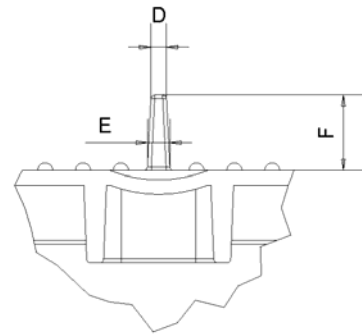

Line Item	Description	A	B	C	D	E	F	G	H	I
3	240-355-300-035 JACK SUPPORT H 35-50 T4-SP02-H10 HEAD	200	35-50	120	2,1	2,6	10	36,7	54,0	
4	240-355-300-050 JACK SUPPORT H 50-70 T4-SP02-H10 HEAD	200	50-70	120	2,1	2,6	10	36,7	54,0	
5	240-355-300-065 JACK SUPPORT H 65-100 T4-SP02-H10 HEAD	200	65-100	120	2,1	2,6	10	36,7	54,0	
6	240-355-300-095 JACK SUPPORT H 95-130 T4-SP02-H10 HEAD	200	95-130	120	2,1	2,6	10	36,7	54,0	
7	240-355-300-125 JACK SUPPORT H 125-160 T4-SP02-H10 HEAD	200	125-160	120	2,1	2,6	10	36,7	54,0	
8	240-355-300-155 JACK SUPPORT H 155-190 T4-SP02-H10 HEAD	200	155-190	120	2,1	2,6	10	36,7	54,0	
9	240-355-300-185 JACK SUPPORT H 185-220 T4-SP02-H10 HEAD	200	185-220	120	2,1	2,6	10	36,7	54,0	

If not otherwise indicated, all measurements are expressed in millimetres.