

Thickness 2,2



Function The jack support has been designed for the installation of any type of flooring on any surface, allowing inspection of the various systems beneath, without needing to demolish anything. The perfect final flooring-leveling is possible thanks to the nut with inside threading which allows movements in height to the nearest millimeter.

Compatibility -

Range h 210-245- h 240-275 - h 270-305 - h 300-335 - h 330-365

Performance The material they are made of makes them resistant to acidic and basic solutions and weathering.

Operating temperature -40°C; +75°C

Recycled product Yes

Included accessories: -

Recyclable product Yes

Optional accessories: Slope corrector
 Levellers
 Adjustable handle
 Distribution disc
 -




Material PP T 20%

Additional information

Jack supports are made 100% with regenerated material from refinery plant.
 All types of Jack Support are guaranteed to bear concentrated loads of 400 kg each.

If not otherwise indicated, all measurements are expressed in millimetres.

Thickness 2,2

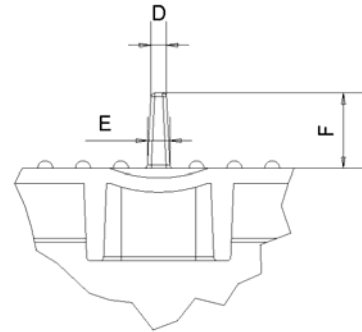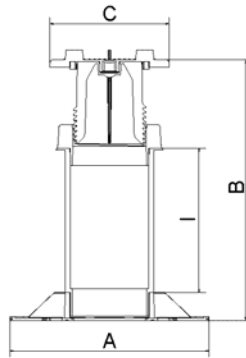

Line Item	Description	A	B	C	D	E	F	G	H	I
10	240-355-300-210 JACK SUPPORT H 210-245 T4-SP02-H10 HEAD	200	210-245	120	2,1	2,6	10	36,7	54,0	144,6
11	240-355-300-240 JACK SUPPORT H 240-275 T4-SP02-H10 HEAD	200	240-275	120	2,1	2,6	10	36,7	54,0	144,6
12	240-355-300-270 JACK SUPPORT H 270-305 T4-SP02-H10 HEAD	200	270-305	120	2,1	2,6	10	36,7	54,0	144,6
13	240-355-300-300 JACK SUPPORT H 300-335 T4-SP02-H10 HEAD	200	300-335	120	2,1	2,6	10	36,7	54,0	144,6
14	240-355-300-330 JACK SUPPORT H 330-365 T4-SP02-H10 HEAD	200	330-365	120	2,1	2,6	10	36,7	54,0	144,6

If not otherwise indicated, all measurements are expressed in millimetres.