



Function The jack support has been designed for the installation of any type of flooring on any surface, allowing inspection of the various systems beneath, without needing to demolish anything. The perfect final flooring-leveling is possible thanks to the nut with inside threading which allows movements in height to the nearest millimeter.

Compatibility -

Range h 85-135 - h 125-215 - h 210-380

Performance The material they are made of makes them resistant to acidic and basic solutions and weathering.

Operating temperature -40°C; +75°C

Recycled product Yes

Recyclable product Yes

Included accessories: -




Material PP T 20%

Optional accessories: Slope corrector
 Levellers
 Adjustable handle
 Distribution disc
 -

Additional information

Jack supports are made 100% with regenerated material from refinery plant.
 All types of Jack Support are guaranteed to bear concentrated loads of 400 kg each.

If not otherwise indicated, all measurements are expressed in millimetres.

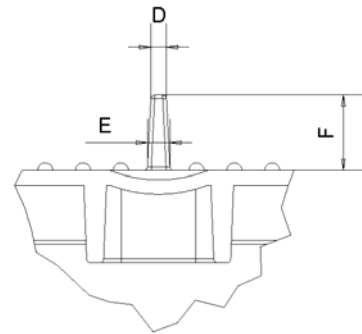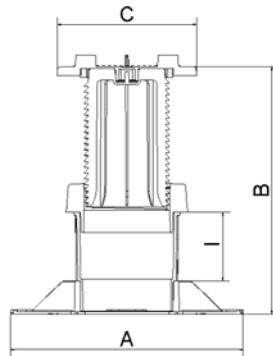

Line Item	Description	A	B	C	D	E	F	G	H	I
15	240-355-301-085 XL JACK SUPPORT H85-135 T4-SP02-H10 HEAD	200	85-135	120	2,1	2,6	10	36,7	54,0	20
16	240-355-301-125 XL JACK SUPPORT H 125-215 T4-SP02-H10 HEAD	200	125-215	120	2,1	2,6	10	36,7	54,0	60
17	240-355-301-210 XL JACK SUPPORT H 210-380 T4-SP02-H10 HEAD	200	210-380	120	2,1	2,6	10	36,7	54,0	144,6

If not otherwise indicated, all measurements are expressed in millimetres.